

CRES 48-2

UNIVERSITY OF KANSAS  
G-298

FILE  
1

## ABSTRACT

27936

The results of an investigation of the directional properties of waves scattered from rough surfaces are presented. The bi-static scattering of ultrasonic waves has been measured for planar surfaces of different known roughness, and the average differential scattering cross section computed. The value of the acoustic measurements is considered from the viewpoint of validation of electromagnetic theories of scattering.

XEROX

1/copy

DDC 1-20

CFSTI

66 27936  
(ACCESSION NUMBER)  
15  
(PAGES)  
CR-75617  
(NASA CR OR TMX OR AD NUMBER)

(THRU)  
1  
(CODE)  
23  
(CATEGORY)

GPO PRICE \$ \_\_\_\_\_

CFSTI PRICE(S) \$ \_\_\_\_\_

Hard copy (HC) 1.00

Microfiche (MF) 150

Reproduced by  
NATIONAL TECHNICAL  
INFORMATION SERVICE  
Springfield, Va. 22151

ff 653 July 65

OMNIDIRECTIONAL SCATTERING OF ULTRASONIC WAVES  
FROM ROUGH SURFACES OF KNOWN STATISTICS  
WITH APPLICATION TO ELECTROMAGNETIC SCATTERING

R. K. Moore and B. E. Parkins \*

Introduction

In the investigation of electromagnetic radiation phenomena, it has often proven useful to conduct acoustic model experiments in cases where the analogous electromagnetic problem presents difficulties not easily or conveniently solved. This has been done successfully in the study of antennas [ 1 ] and in the areas of scattering in turbulent media [ 2 ] and from rough surfaces [ 3 ] . The areas of investigation are restricted, however, by the scalar nature of the acoustic waves, and the study of polarization effects is necessarily excluded. An important application of model experimentation is then the study of electromagnetic phenomena for which polarization is not important. Another, perhaps more important, application, and the one considered here, is the verification of theories for which the acoustic and electromagnetic forms have common foundations.

The model experiments described here were performed to investigate the characteristics of omnidirectional scatter from rough surfaces. The scattering surfaces were constructed to be smooth

\* Center for Research, Inc., University of Kansas, Lawrence, Kansas  
under NASAGRANT N<sub>2</sub>G 298

enough to satisfy the conditions of the Kirchhoff theory of scattering [4], and the experiments, therefore, provide information useful for the verification of this theory.

### Technique of Experiment

The characteristics of omnidirectional scatter were investigated by measuring bi-statically the average differential scattering cross section [5],  $\sigma_0$ , as a function of the set of angles  $(\phi_0, \phi_1, \phi_2)$  (see figure #1) and the parameters describing the rough surfaces. At the frequency used, the surfaces were sufficiently rough to achieve a near-complete conversion to scatter power. In this case, the average power received is

$$\langle P \rangle = \iint_S \frac{P_t G_t(\Psi_t)}{4\pi r_t^2} \sigma_0 \frac{\lambda^2 G_r(\Psi_r)}{4\pi r_r^2} dA \quad (1)$$

where:  $\langle P \rangle$  is the configuration average of the received power

$G_r(\Psi_r)$  and  $G_t(\Psi_t)$  are the gain functions of the acoustic transducers

$\lambda$  is the wavelength

$S$  is the illuminated area

$P_t$  is the transmitted power

The transducers used were of high directivity ( $6^\circ$  between half power points) permitting the approximation to be made that  $\sigma_0$  is constant over the illuminated area; using this in eq. (1) gives

$$\langle P \rangle = \sigma_0 \iint_S \frac{P_t G_t(\Psi_t)}{4\pi r_t^2} \frac{\lambda^2 G_r(\Psi_r)}{4\pi r_r^2} dA \quad (2)$$

The measurement of  $\sigma_0$  was done by measuring  $\langle P \rangle$  over an ensemble of rough surfaces and evaluating the integral over the illuminated area (thereby accounting for "aperture effect") as a function of the angles  $(\phi_0, \phi_1, \phi_2)$ .

The experiments were performed in a water tank of dimensions  $(6' \times 8' \times 11')$  (see figure 2). Because of the proximity of the tank walls and the surface of the water, it was necessary to use a pulse modulated oscillator, which operated at a frequency of one megacycle ( $\lambda = 1.5$  millimeters in water). The pulse width of the modulation was sufficiently long to establish a beam width limited condition [6] and the transmitted power in eq.s (1) and (2) is a constant in time. The ensemble of rough surfaces was obtained by rotating the rough surface targets (shown in figure 2) through the transducer beam thereby generating the fading signal from which the average power was calculated.

Two planar rough surfaces with different reflectivities and surface roughnesses were constructed. One of these was made by striking mild steel sheet randomly with a ball peen hammer. The other surface was made by flowing grout over a sand surface thereby producing a smooth surface with reflectivity different from steel. The surface roughnesses were determined by making sampled height measurements using a depth gauge mounted on a machined surface. From these measurements the sample distribution of heights and sample autocorrelation function of both surfaces were calculated.

These are shown in figures 3 and 4. The waves of the sample auto-correlation functions are fit, approximately, by the Gaussian function

$$r = e^{-\left(\frac{x}{L}\right)^2}$$

however, near the origin a three halves power function gives better agreement. The sample distribution functions are seen to be approximately Gaussian.

### Results

Measurements of  $\sigma_0$  were made as a function of the azimuthal angle,  $\phi_0$ , for a range of values of the depression angles  $\phi_1$  and  $\phi_2$ . Figures 5 and 6 show curves of  $\sigma_0$  against  $\phi_0$  for variation of the depression angles when they are both equal. Figures 7 and 8 show the variation of  $\sigma_0$  against  $\phi_0$  when the depression angle  $\phi_1$  is fixed at  $40^\circ$  and  $\phi_2$  is allowed to vary. The curves for both surfaces are similar in shape and the difference in the surfaces is shown, largely, by the relative amplitudes of the curves. An important feature which is common to the curves of figures 5 and 6 is the near-constancy of  $\sigma_0$  in the specular direction ( $\phi_1 = \phi_2$ ,  $\phi_0 = 0$ ).

### Summary and Conclusions

The measurement of the scatter of acoustic waves provides a basis for determining the validity of theories for the prediction of the analogous electromagnetic scatter as all electromagnetic scatter theories also take an acoustic form. The omnidirectional measurement of  $\sigma_0$  gives a complete description of the scattering (no restriction on angles


of incidence or observation) and therefore affords the opportunity to make a more rigorous test of theory validity. The experiments described here are especially useful for this purpose as the scattering surfaces are of known roughness. A prediction of the experimental results based on the Kirchhoff approximation has been made and will be reported on at a later time.

#### acknowledgements

The support of the National Science Foundation under grant NSF GP 2259 and the National Aeronautics and Space Administration under grant NSG 298 is gratefully acknowledged.

### References


- [1] Jordan, E. C. "Acoustic Models of Radio Antennas," Ohio State University Engineering Experiment Station Bulletin #108, May, 1941.
- [2] Edison, A., D. Bliss, and G. Policky. "Acoustic Wave Propagation in a Random Medium," presented at the Fall, 1963 URSI meeting.
- [3] Moore, R. K. "Acoustic Simulation of Radar Returns," Microwaves, vol. 1, no. 7, Dec. 1962, pp. 20-25.
- [4] Beckmann, P. and A. Spizzichino. The Scattering of Electromagnetic Waves from Rough Surfaces, The Macmillan Company, New York, 1963, p. 29.
- [5] Morse, P. M. and H. Feshbach. Methods of Theoretical Physics, McGraw-Hill Book Company, Inc., New York, p. 1066.
- [6] Moore, R. K. and C. J. Williams, Jr. "Radar Terrain Return at Near-Vertical Incidence," Proc. IRE, vol. 45, Feb. 1957, pp. 228-238.

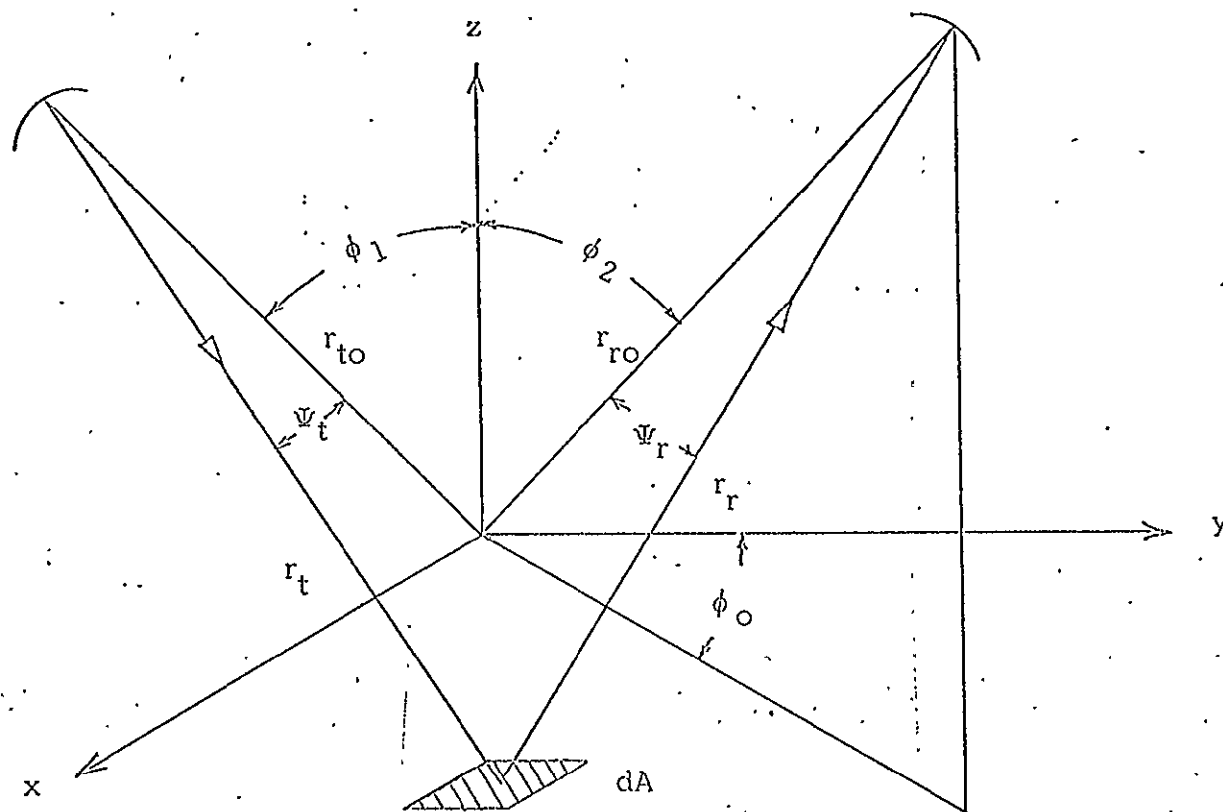


GEOMETRY OF BI-STATIC SCATTERING

FIGURE 1



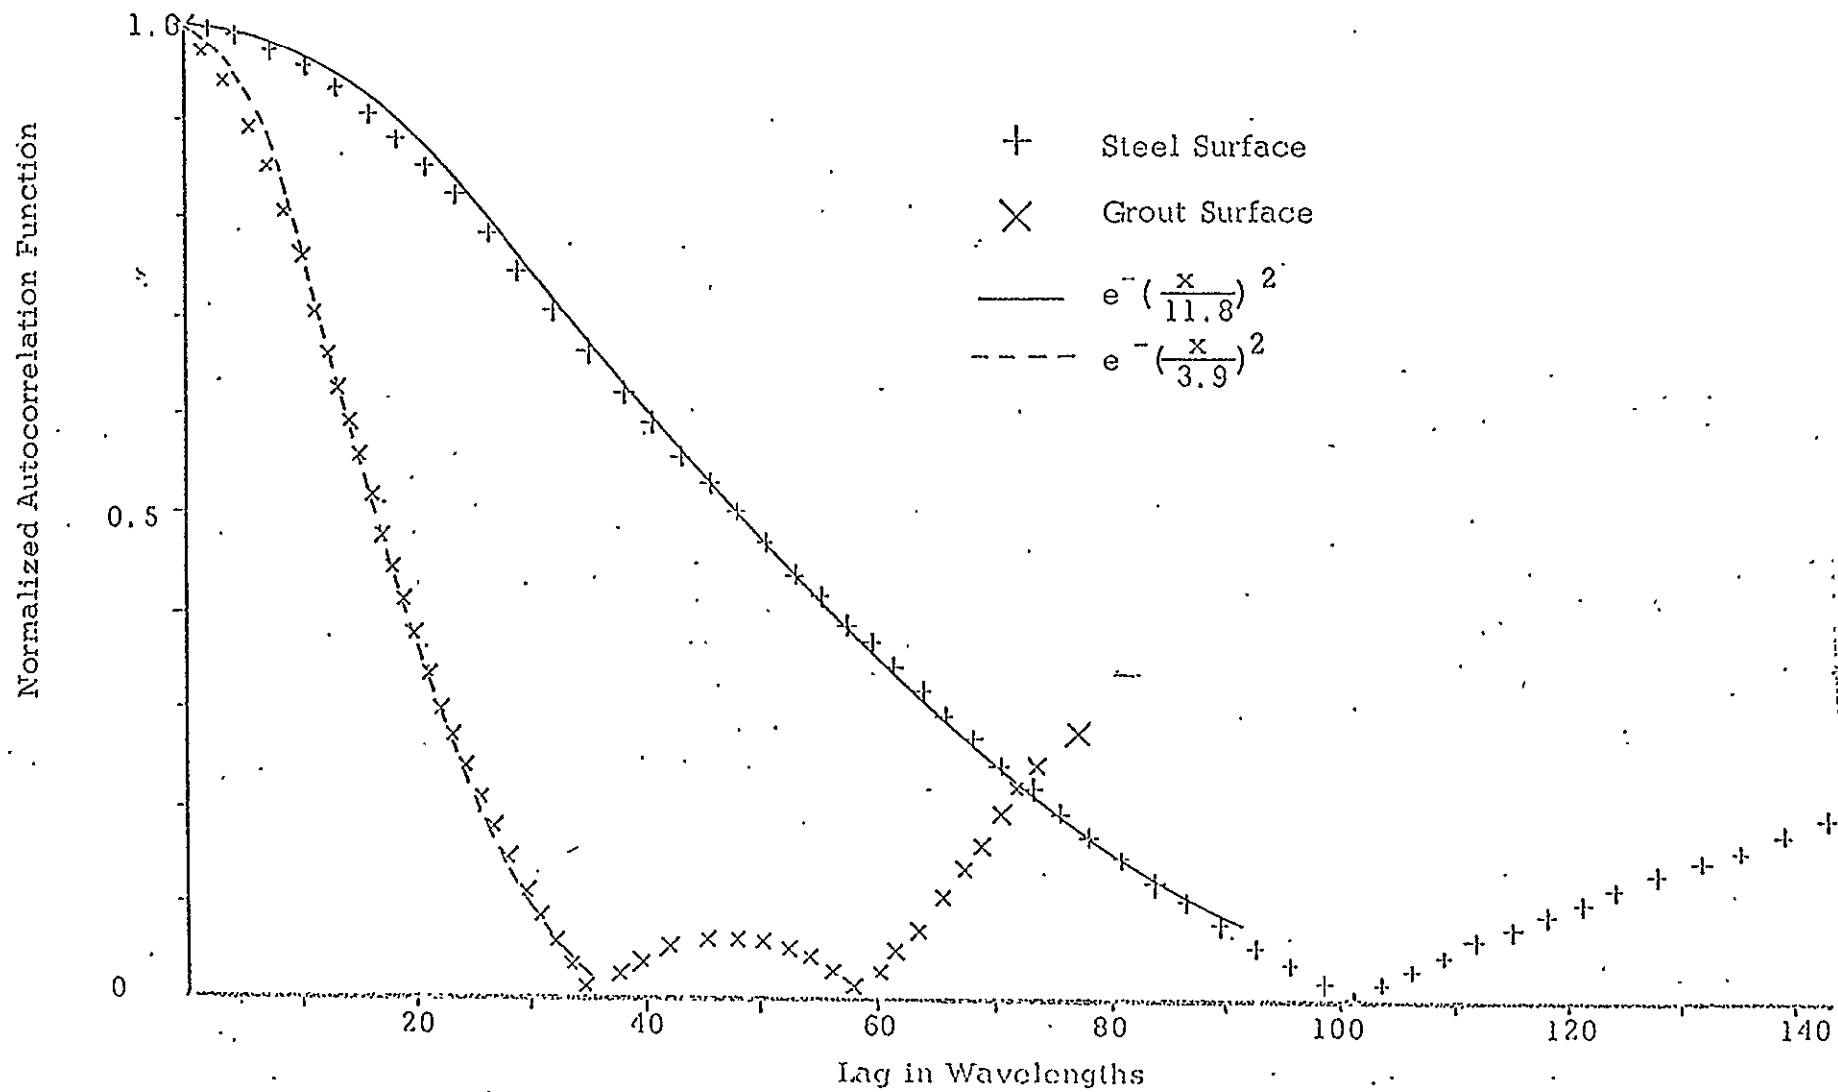

SAMPLE AUTOCORRELATION FUNCTIONS

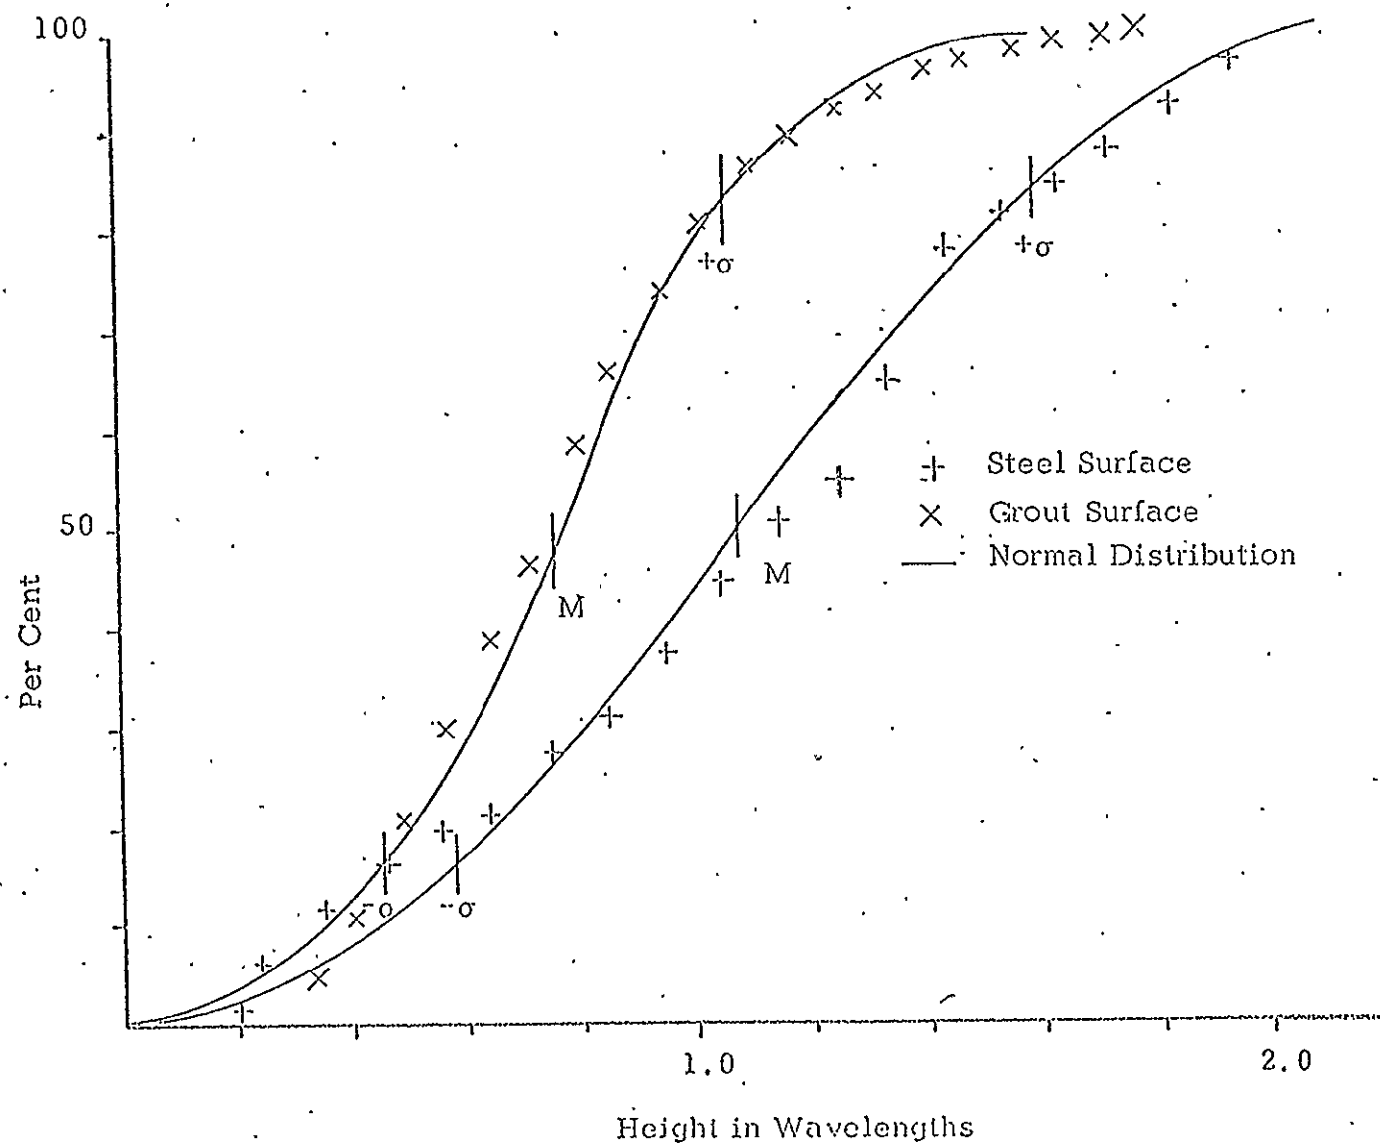

DISTRIBUTION OF SURFACE HEIGHTS FOR THE STEEL,  
AND GROUT SURFACES

FIGURE 4

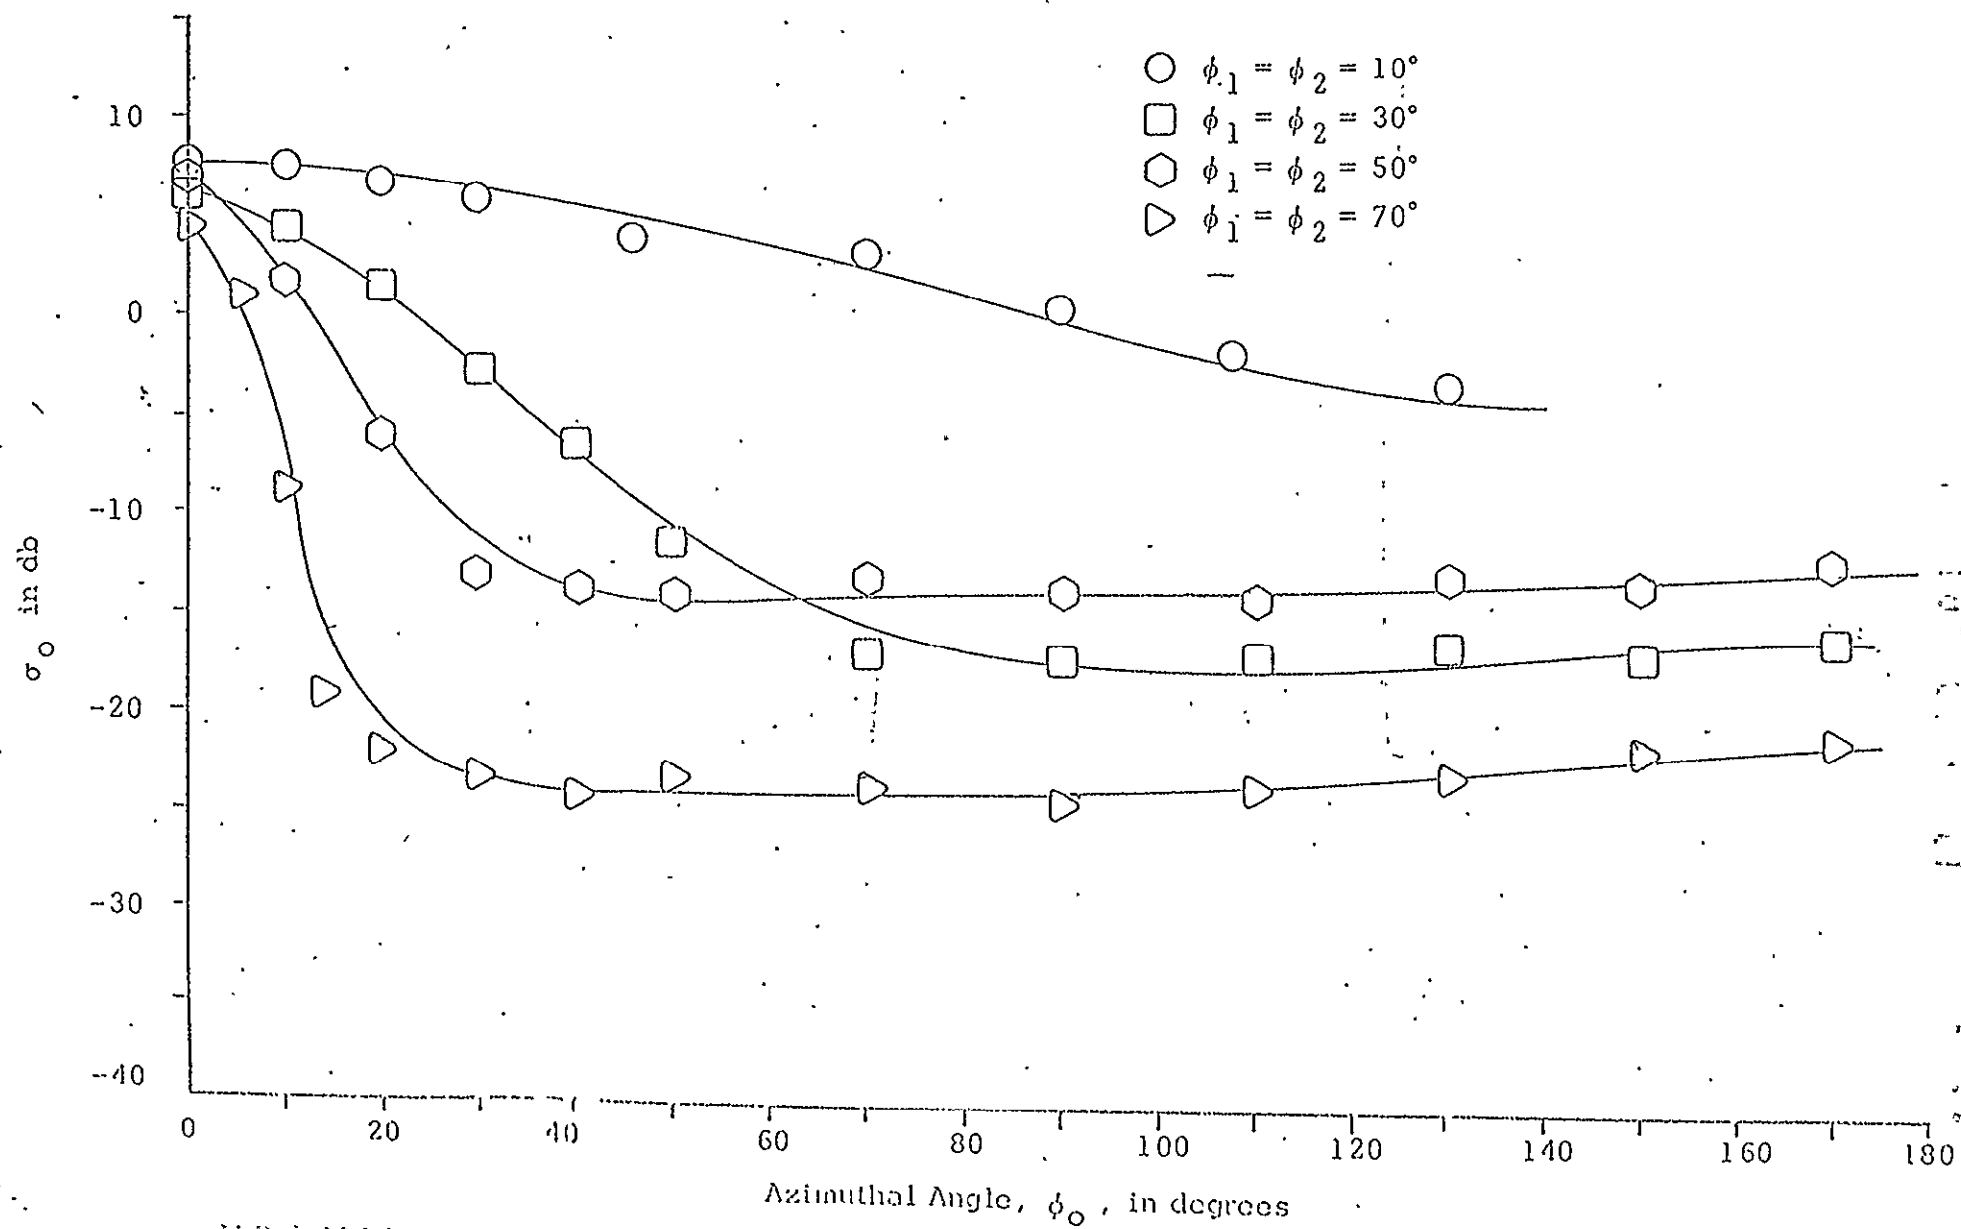


FIGURE 1. SCATTERING CROSS SECTION,  $\sigma_0$ , FOR THE STEEL SURFACE WITH TRANSMITTER AT AN ANGLE  $\phi_1 = \phi_2$  FROM THE NORMAL.

19 66 30461  
MHC  
|

10-10-67

Document affected-No.  
and title

SEE REMARKS

Change No. 3 Date issued

N66-27196

17-558 12 May 67

Authority for change: ☐ Input ☐ DDC ☐ AEC ☐ NASA ☐ Oral ☐ Written ☐ Removed by:  
☐ Other: J. Name: ASHLEY SUTTON/CLAY 3/3/67

Changes  
a. Cancel, duplicate of:  
b. Cancel, superseded by:  
c. Withdraw from public sale  
☐ (1) Destroy doc & related papers  
☐ (2) Return doc & related papers to:  
☐ DDC-1 ☐  
d. Change dist/avail code to:  
e. Other:  
NOT REPRODUCIBLE, NOT AVAILABLE.

Remarks  
N66-27026 (NASA TM X-56746)  
N66-27067 (NASA TM X-56893)  
N66-27196 (NASA TT F-8019)  
N66-27242 (NASA CR-75379)  
N66-27936 (NASA CR-75617)  
N66-28080 (NASA CR-75754)  
N66-28427 (NASA CR-75693)

Clearinghouse for Federal Scientific  
and Technical Information  
17 (Rev.) JAN 67

U.S. DEPARTMENT OF COMMERCE  
NATIONAL BUREAU OF STANDARDS

☐ INPUT ☐ ANNOUNCING ☐ CATALOG ☒ FILES